




SCAN & VISIT OUR WEBSITE




# ATLANTA TELECOM

uPVC TELECOMMUNICATION PIPES & FITTINGS

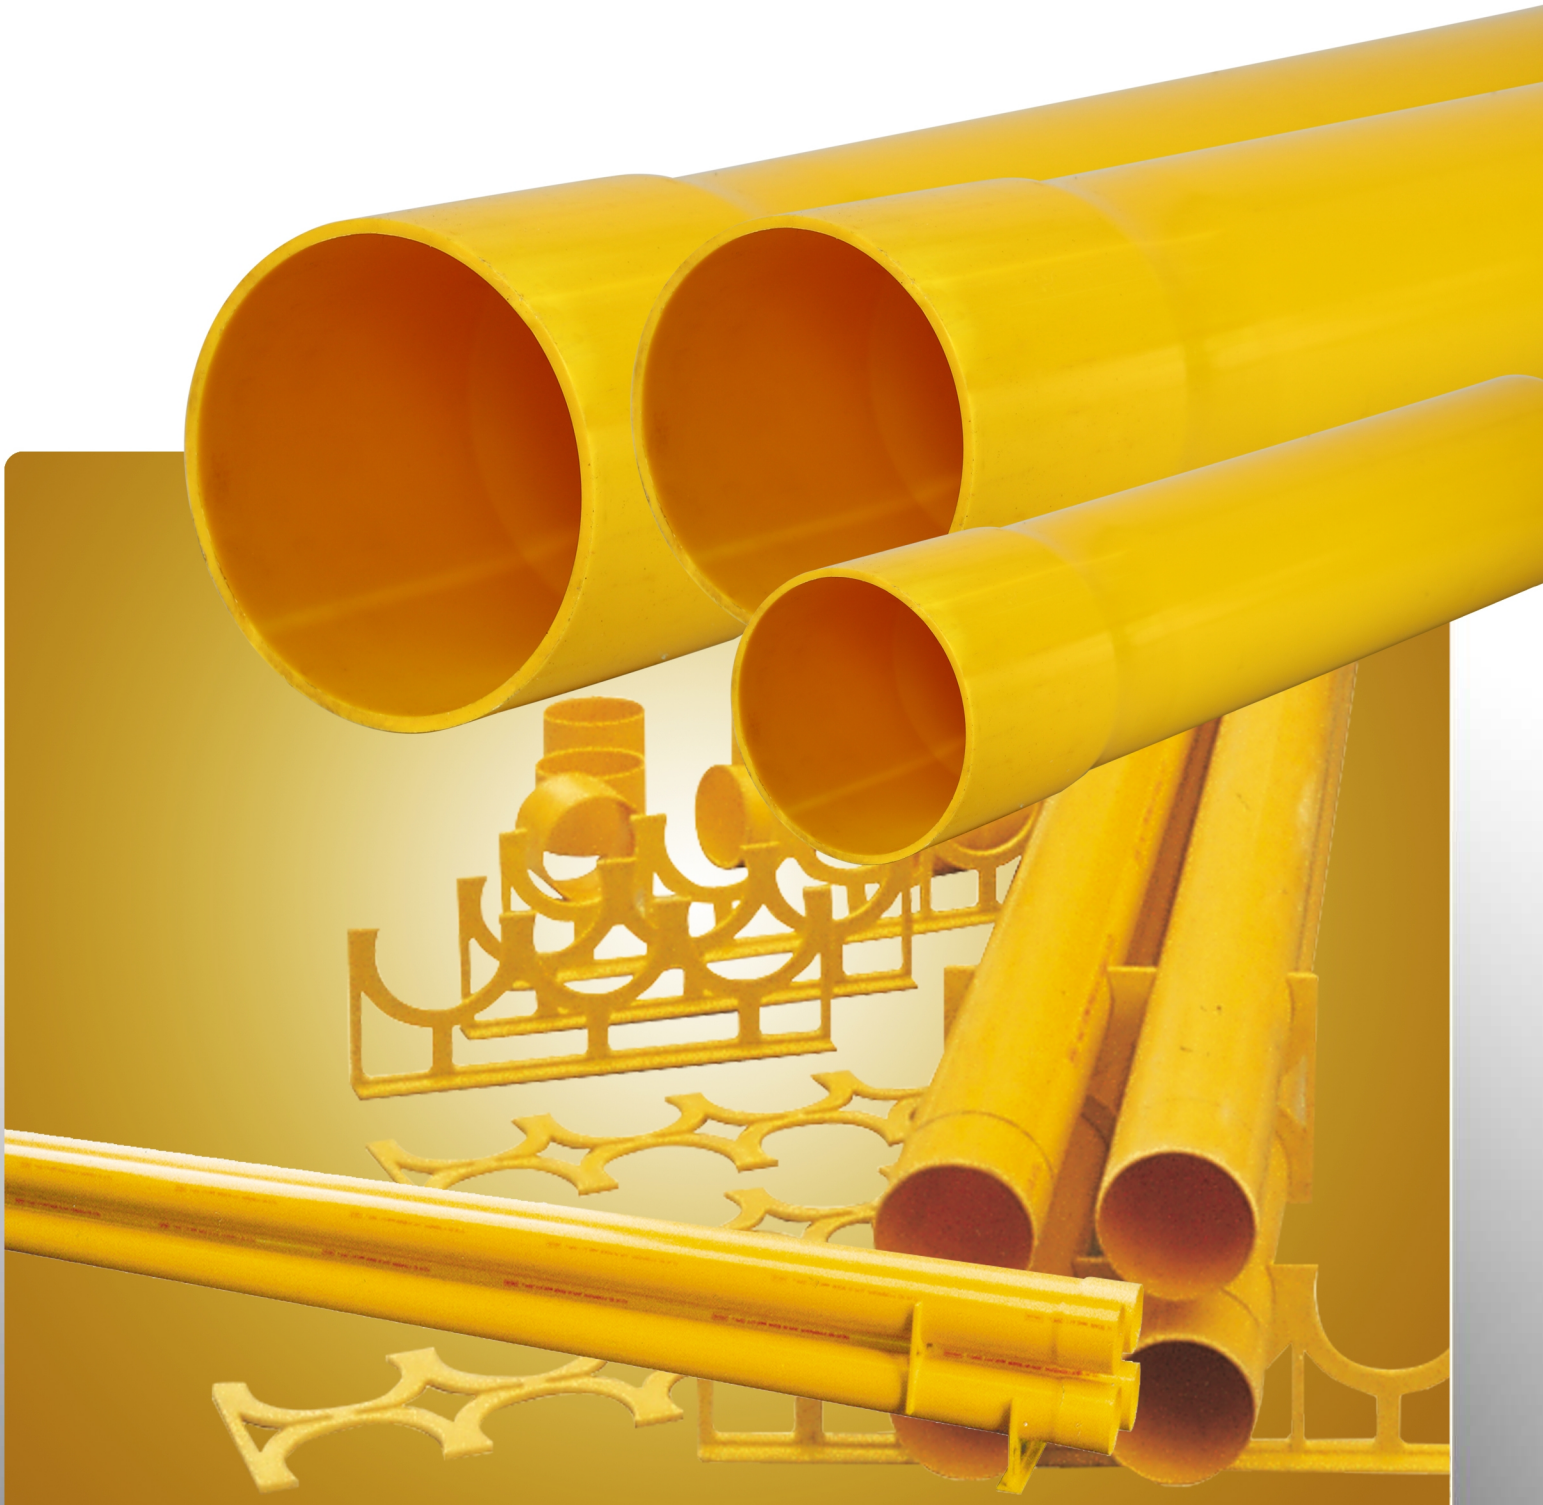

## PVC TELECOM PIPE (SOLVENT TYPE)


STANDARD	:	ASTM F 512
ADVANTAGES	:	Dielectric Strength, Resistance to Burning Compression Resistance, Weather Proof
COLOR	:	High Insulation yellow / grey
JOINTING METHOD	:	Solvent Cement

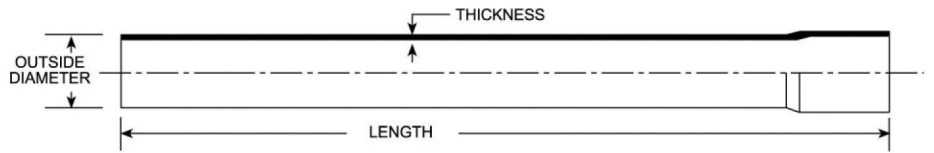

NOMINAL SIZE (in)	OUTSIDE DIAMETER (mm)	WALL THICKNESS (mm)	SOCKET LENGTH (mm)	EFFECTIVE LENGTH (M)
4	114.30	3.33	85.73	4 6

## HDPE TELECOM PIPES (SDR 13.6)

STANDARD	:	ISO 4427
COLOR	:	black




NOMINAL OD (mm)	WALL THICKNESS (mm)	STANDARD LENGTH (M)
32	2.4 - 2.9	100
40	3.0 - 3.5	60
50	3.7 - 4.3	60

## PVC FITTINGS

MOULDED COUPLING			SLEEVE COUPLING			DUCT PLUG					
NOM. SIZE	PC./ SACK		NOM. SIZE	PC./ SACK		NOM. SIZE	PC./ SACK				
4"	15		4"	15		4"	50				
DUCT SPACER (flat back)	NOM. SIZE	GROOVE	PC./SACK	DUCT SPACER (back to back)	NOM. SIZE	GROOVE	PC./SACK	45° BEND	NOM. SIZE	RADIUS	PC./SACK
	4"	2	20		4"	2	20		4"	1.0m	5
	4"	3	10		4"	3	10		4"	0.5m	5
	4"	4	10		4"	4	10				
END BELL	NOM. SIZE	JOINT METHOD	PC./SACK	90° BEND	NOM. SIZE	RADIUS	PC./SACK				
	4"	SOLVENT CEMENT			4"	1.0m	5				
	4"	RUBBER RING			4"	0.5m	5				

## HDPE GUY WIRE PROTECTOR PIPE

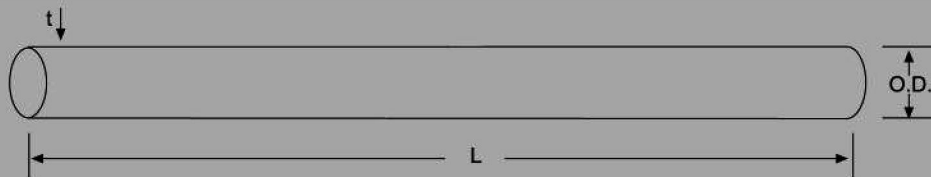

SPECIFICATION	:	HDPE SDR 17
COLOR	:	yellow

SIZE (in)	OUTSIDE DIAMETER (mm)	THICKNESS (mm)	LENGTH (M)
1"Ø	33.40	3.37	2.13 PLDT 2.03-MERALCO

**NOTE:** Also available in slitted type and provided with a hole for fastening.



35th Flr. Atlanta Center Bldg., No. 31 Annapolis St. Greenhills, San Juan City  
 Tel. No.: 8723-0781 to 88 | Fax No.: 7744-4703 / 8584-2997  
 Website: www.atlanta.ph Email Sales: marketing@atlanta.ph  
 Like Us on Facebook: atlantaindustriesincorporated  
 Subscribe to Our Youtube Channel: Atlanta Industries Inc.