





**ATLANTA
INDUSTRIES**

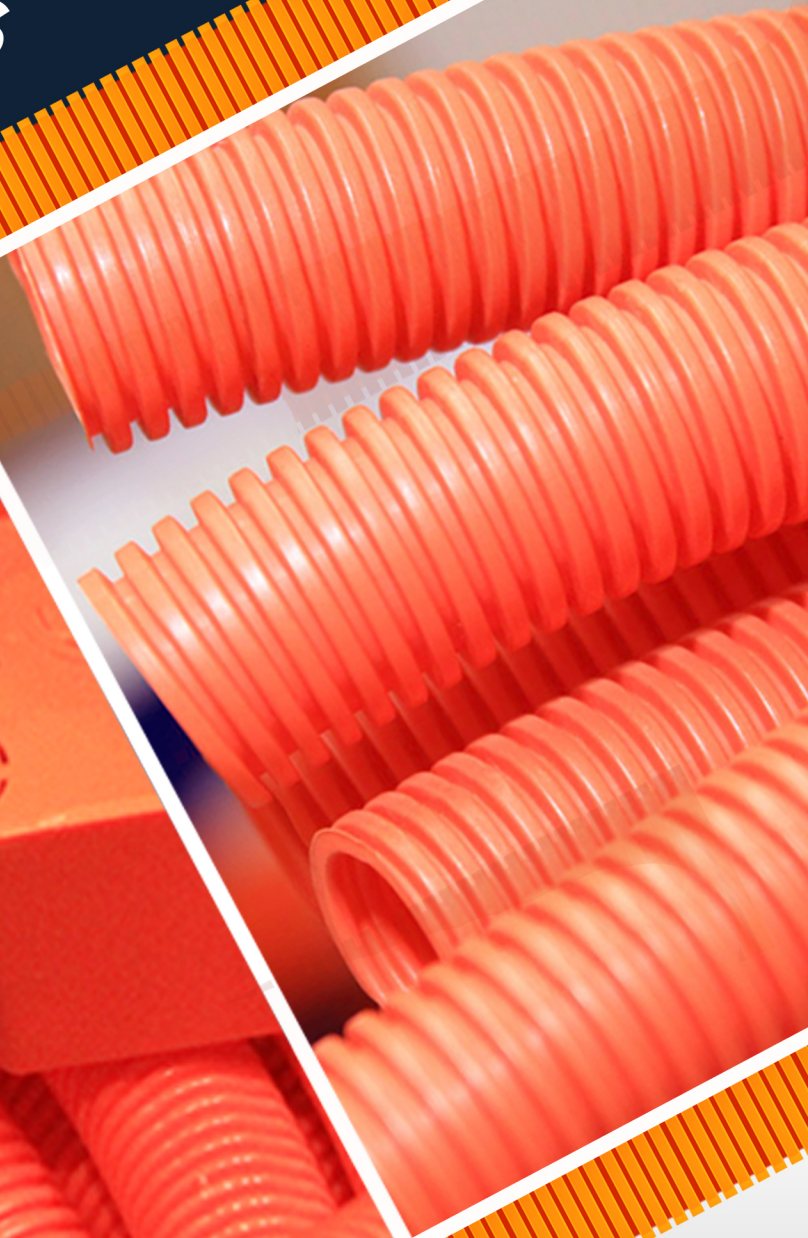

PERMAFLEX
PVC CORRUGATED FLEXIBLE CONDUIT

DIMENSION

PVC CORRUGATED CONDUIT

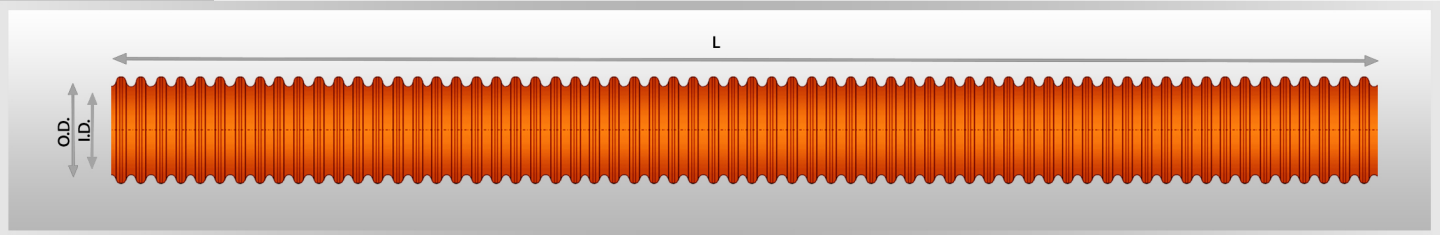

Nominal(mm.)	Size(in.)	O.D	I.D	Standard Length / Coil
20	1/2	20	15.2	100/50 LM
25	3/4	25	19.8	100/50 LM

DIMENSION

TECHNICAL DATA

- Highly Flexible PVC Conduit
- Tough, Durable & Cost Effective
- Easy to use
- Lightweight
- Used Effectively to protect electrical wirings in underground and above ground installations



MECHANICAL RESISTANCE | 125 N / 5 cm



CLASSIFICATION | EN 50 086-1141, IEC 614-125



COLOR | RED ORANGE RAL 2001



MATERIAL | PVC Self-Snuffing



FLAMABILITY RESISTANCE




TEMPERATURE RESISTANCE SCOPE OF APPLICATION | -25 - + 60 °C

MALE ADAPTER




(mm)	(in)
20	1/2
25	3/4
32	1
40	1 1/4
50	1 1/2
63	2
75	2 1/2
90	3
110	4

CONNECTOR




(mm)	(in)
20	1/2
25	3/4

BUSHING W/ LOCKNUT



(mm)	(in)
20	1/2
25	3/4

JUNCTION BOX W/ BRASS NUT



H
44mm

UTILITY BOX



L
108mm
W
58mm
H
45mm

SCAN QR CODE & DOWNLOAD BROCHURE

